



- FC, SC, ST, MU, LC PC, UPC APC
- Φ0.9mm, Φ2.0mm
-
-
-
-
-
-
-
-
- YD/T 1272.4-2007, YD/T 1272.3-2005, YD/T 987-1998, YD/T 1200-2002, YD/T 1272.1-2003
- IEC 61754-13 2006, IEC 61754-4 2013, IEC 61754-2 1996, IEC 61754-6 2005, IEC 61754-20 2012
- GR-326-CORE

			PC	UPC	APC
S	L		0.2dB(L), 0.3(S)		
		dB	0.1		——
S	L		55dB(L), 50(S)		60
		dB	36		——
		dB	0.1		
		dB	0.2		0.3
		Times	1000		
			-40~80		

M□-□/□-□/□-□-□-□-□


- Cable 10:10m, customer specify
- Fan-out Cable 20: 2.0mm, 30: 3.0mm
- Fan-out Length 0.7:0.7m,0.2/0.3:Connector1 fan-out 0.2m, Connector2 fan-out 0.3m, customer specify
- Fiber Type S:G.652,A2:G.657A2,B:G657B,M:Multimode (50/125),D:Data(62.5/125),OM3,OM4
- Endface2 PC,UPC,APC,0:Pigtail
- Connector2 FC,SC,SC2,ST,MU,LC,LC2,0:Pigtail
- Endface1 PC, UPC, APC
- Connector1 FC,SC,SC2,ST,MU,LC,LC2
- Cores 4:4Cores,6:6Cores, 8:8Cores,12:12Cores,



- FC, SC, ST, MU, LC PC, UPC APC
- $\Phi 0.9\text{mm}$, $\Phi 2.0\text{mm}$
-
-
-
-
-
-
-
- YD/T 1272.4-2007, YD/T 1272.3-2005, YD/T 987-1998, YD/T 1200-2002, YD/T 1272.1-2003
- IEC 61754-13 2006, IEC 61754-4 2013, IEC 61754-2 1996, IEC 61754-6 2005, IEC 61754-20 2012
- GR-2866-CORE

			PC	UPC	APC
S	L		dB0.2dB(L), 0.3(S)		
			dB0.1		—
S	L		dB55dB(L), 50(S)		60
			dB36		—
			dB0.1		
			dB0.2		0.3
		Times	1000		
			-40~80		

R-□-□/□-□/□-□-□-□

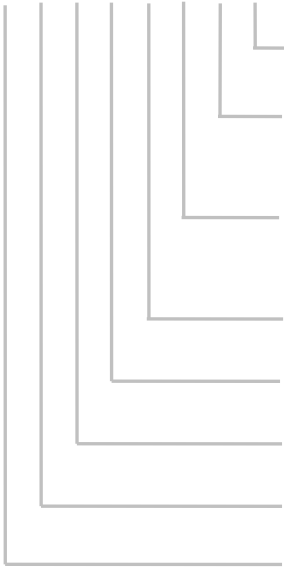

1:1m,

/ 09: Φ0.9mm, 20: Φ2.0mm, 22: Φ2.0mm zipcord duplex, 30: Φ3.0mm,33: Φ3.0mm zipcord duplex

S:G.652, A2:G.657A2, B:G657B, M:Multimode(50/125), D:Data(62.5/125),OM3,OM4

PC,UPC, APC,0:

FC,SC,SC2,ST,MU,LC,LC2,0:

PC, UPC, APC

FC,SC,SC2,ST,MU,LC,LC2

4:4 , 6:6 , 8:8 ,12:12