


10 GB/s 10Km CWDM SFP+ Transceivers

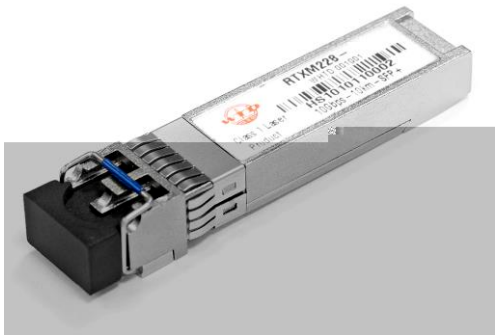

The RTX228-5XX 10Gigabit DFB laser with CWDM transceiver is designed to transmit and receive serial optical data links up from 8.5 Gb/s to 10.52 Gb/s data rate over 10km singlemode fiber. The Transceiver is compliant with SFF-8432, 10GFC, FC-PI-4, IEEE802.3ae and applicable portions of SFF-8431. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

Specifications

(tested under recommended operating conditions, unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Nominal Wavelength		nm	1271,1291,1311,1331, The confirmation of the else wavelength is according to the future study.			CWDM
Wavelength Drift	Δ	nm	-6.5		+6.5	
Side Mode Suppression Ratio	SMSR	dB	30			
Optical Output Power	Pav	dBm	-2.4		+5	1
Extinction Ratio	ER	dB	3.5			

Average launch power of
OFF transmitto15.71 15.(f 1 (

10 GB/s 10Km CWDM SFP+ Transceivers

Ordering Information

Specifications												
Part No.	Electrical		Optical		Mechanical		Environmental		RoHS		Application	
	Symbol	Unit	Symbol	Unit	Symbol	Unit	Symbol	Unit	Symbol	Unit	Symbol	Unit
RTXM228-501	TX Power	dBm	TX Power	dBm	Wavelength	nm	Operating Temp	°C	Storage Temp	°C	RoHS	Compliant
RTXM228-502	TX Power	dBm	TX Power	dBm	Wavelength	nm	Operating Temp	°C	Storage Temp	°C	RoHS	Compliant
RTXM228-503	TX Power	dBm	TX Power	dBm	Wavelength	nm	Operating Temp	°C	Storage Temp	°C	RoHS	Compliant
RTXM228-504	TX Power	dBm	TX Power	dBm	Wavelength	nm	Operating Temp	°C	Storage Temp	°C	RoHS	Compliant

Part NO.	Wavelength(nm)		
	min	type	max
RTXM228-501	1263.5	1271	1278.5
RTXM228-502	1283.5	1291	1298.5
RTXM228-503	1303.5	1311	1318.5
RTXM228-504	1323.5	1331	1338.5

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
TX Power	P _{TX}	dBm	-1	0
TX Power	P _{TX}	dBm	-1	0
TX Power	P _{TX}	dBm	-1	0


Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
TX Power	P _{TX}	dBm	-1	0	0
TX Power	P _{TX}	dBm	-1	0	0
TX Power	P _{TX}	dBm	-1	0	0

10 GB/s 10Km CWDM SFP+ Transceivers

10 GB/s 10Km CWDM SFP+ Transceivers

Pin function definitions

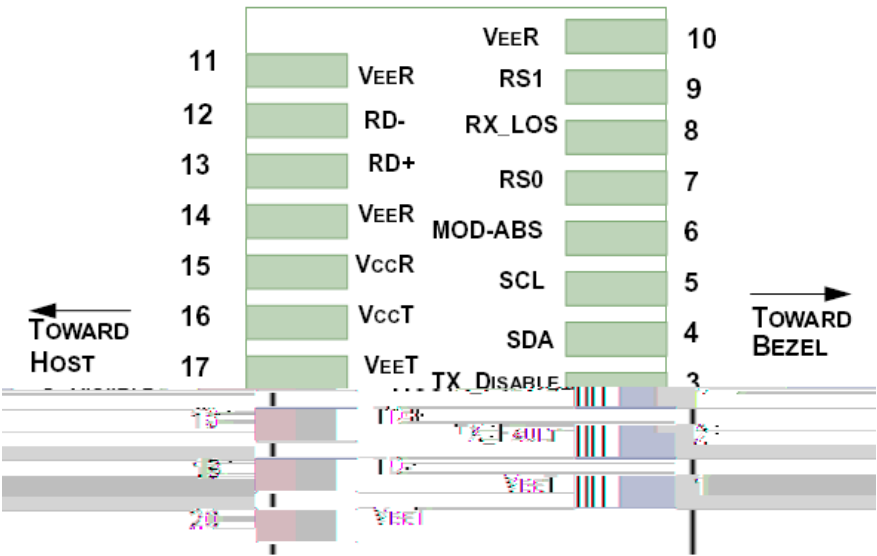


Pin Number	Symbol	Name	Description
1,17,20	VeeT	Transmitter Signal Ground	These pins should be connected to signal ground on the host board.
2	TX Fault	Transmitter Fault Out (OC)	

10 GB/s 10Km CWDM SFP+ Transceivers


15	VccR	Receiver Power Supply	This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter
16	VccT	Transmitter Power Supply	This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter
18	TD+	Transmitter Positive DATA In (CML)	ter DATA inputs are internally AC coupled and terminated
19	TD-	Transmitter Negative DATA In (CML)	inputs are internally AC coupled and terminated stor.

Typical Application Circuit

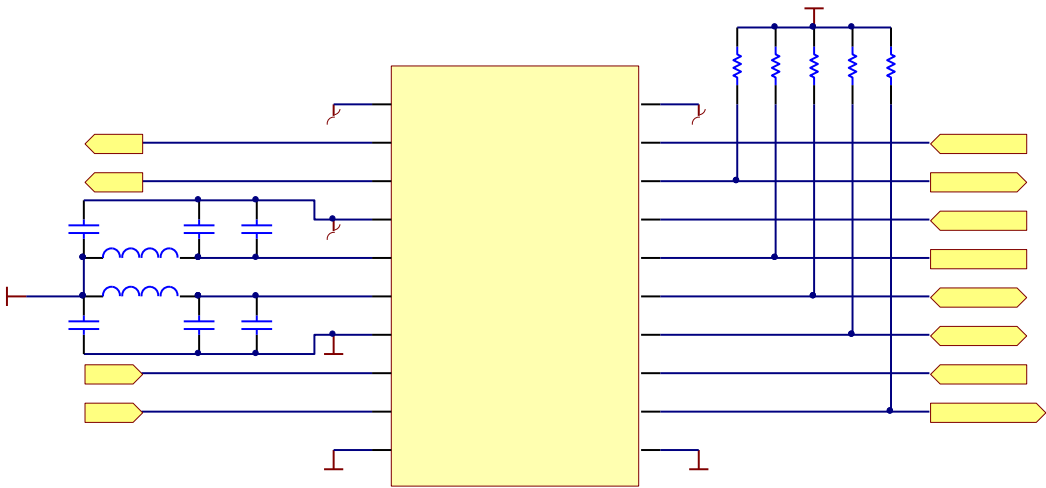

10 GB/s 10Km CWDM SFP+ Transceivers

Package Outline

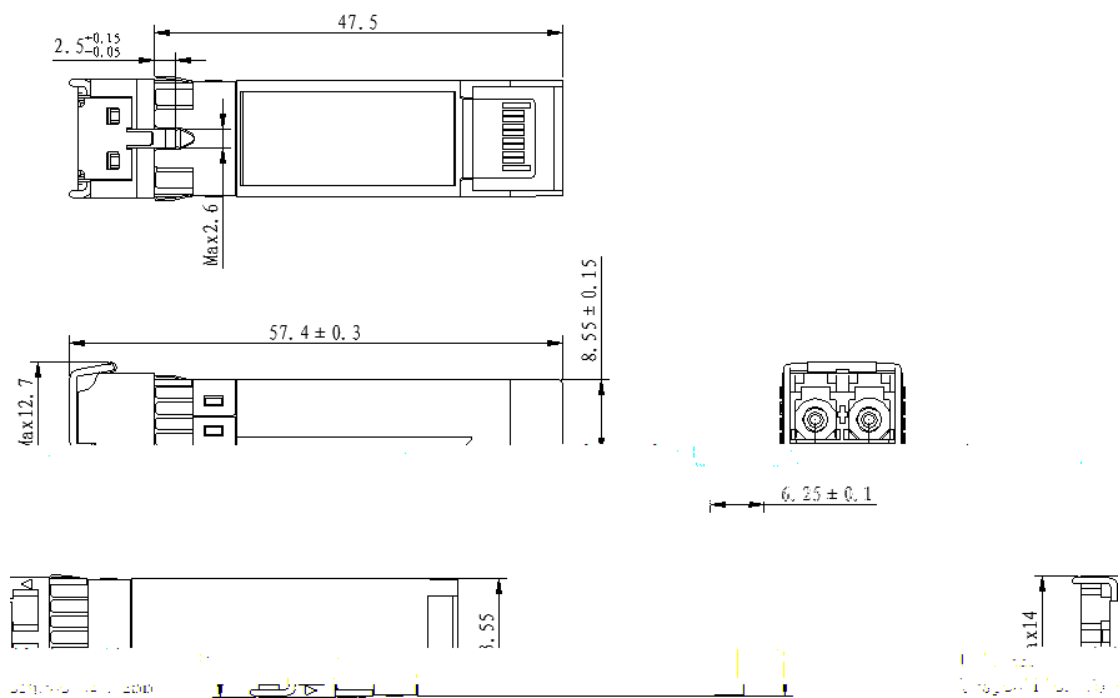

Regulatory Compliance

Feature	Test Method	Performance
: a X d V X 9 X V g □ H 9 : a X g X V a E c	B > A "H I 9" - - (8 B d (%	8 d / □ % / K d a
: a X d V X 9 X V g □ H 9 > b b c	K V g V d c d ≥ 8 + % / %) "	A K) □ g X V g / K 0 8 d c V X E g d g V c X X g d c / 7 X V g / - K
: a X g d b V c X > c g c X □ B >	8 > H E G Δ : 8 d / 7 : C % 8 d / 7 ; 8 8 d / 7	8 d b e a V c V c V g
> b b c	≥ 8 + % / %) "(8 d / : C %)	I e X V a d c d b V V a X g d b V (K b a e g d b - % d % / % V e e a d g V c X g d V X V c X a d g