

10Gbps 70KM CWDM XFP Optical Transceiver RTXM226-69X

Specifications

(Tested under recommended operating conditions, unless otherwise noted)

Parameter	Symbol	Unit	Value		
			Min	Typ	Max
Optical Transmitter Characteristics					
Data Rate	-	Gbps	9.95	-	11.1
Optical Power	P ₀	dBm	0	-	4
Center Wavelength Range	c	nm	1464.5		1617.5
Center Wavelength Spacing	Δ	nm	-6.5		6.5
Extinction Ratio	ER	dB	9	-	-
Spectral Width (-20dB)		nm	-	-	0.3
SMSR	-	dB	30	-	-
Relative Intensity Noise	RIN	dB/Hz	-	-	-128
Eye Diagram	Compliant with ITU-T G.691				
Optical Receiver Characteristics					
Data Rate	-	Gbps	9.95	-	11.3
Center Wavelength Range	c	nm	1260	-	1620
Receiver Sensitivity ²	S	dBm	-	-	
Receiver Sensitivity at 70km @ 1471~1551nm	S	dBm			-20



10Gbps 70KM CWDM XFP Optical Transceiver RTXM226-69X

Ordering Information

Part No.	Specifications								
	Package	Data rate	Laser	Optical Power	Detector	Sensitivity	Top	Reach	Others
RTXM226-69X	XFP	10G	CWDM EML	0 ~ 4dBm	APD	<-23dBm	-40~85°C	70km	DDM,RoHS

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
Supply Voltage 1	V _{CC3}	V	-0.5	4.0
Supply Voltage 2	V _{CC5}	V	-0.5	6.0
Storage Temperature	T _s	°C	-40	85
Operating Case Temperature	T _c	°C	-40	85
Relative Humidity (Non condensation)	-	%	5	90

Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Operating Case Temperature	T _c	°C	-40	-	85
Supply Voltage 1	V _{CC3}	V	3.13	3.3	3.47
Supply Current 1	I _{CC3}	mA	-	-	750
Supply Voltage 2	V _{CC5}	V	4.75	5.0	5.25
Supply Current 2	I _{CC5}	mA	-	-	500
Power Dissipation	-	W	-	-	3.5

Electrical Characteristics

(Tested under recommended operating conditions, unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Input Differential Impedance	R _{in}		-	100	-	
Differential Data Input Swing	V _{in,pp}	mV	120	-	1000	
Transmit Disable Voltage	VD	V	2.0	-	V _{CC3}	
Transmit Enable Voltage	VEN	V	0	-	+0.8	
Transmit Disable Assert Time	-		-	-	10	
Receiver						
Differential Data Output Swing	V _{out,pp}	mV	400	-	800	
Data Output Rise Time	T _r	ps	24	-	-	
Data Output Fall Time	T _f	ps	24	-	-	
LOS Fault	-	V	V _{dd3} -0.5	-	V _{dd3}	1



10Gbps 70KM CWDM XFP Optical Transceiver RTXM226-69X

LOS Normal	-	V	0	-	+0.8	
Note1: V_{dd3} is host +3.3V power supply.						


Low Speed Electrical Interface

Parameter



10Gbps 70KM CWDM XFP Optical Transceiver RTXM226-69X

Pin Description

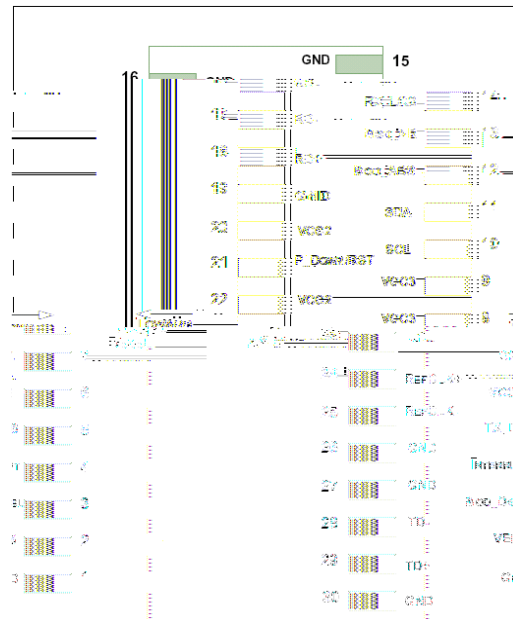

Pin	Logic	Symbol	Name/Description	Note
1		GND	Module Ground	1
2		VEE5	Optional -5.2V Power Supply (Not Required)	
3	LVTTTL-I	Mod_DeSel	Module De-select; When held low allows module to respond to 2-wire serial interface	
4	LVTTTL-O	Interrupt	Interrupt; Indicates presence of an important condition which can be read over the 2-wire serial interface	2
5	LVTTTL-I	TX_DIS	Transmitter Disable; Turns off transmitter laser output	
6		VCC5	+5V Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	I/O	SCL	2-Wire Serial Interface Clock	2
11	I/O	SDA	2-Wire Serial Interface Data Line	2
12	LVTTTL-O	Mod_Abs	Indicates Module is not present. Grounded in the Module	2
13	LVTTTL-O	Mod_NR	Module Not Ready; Indicating Module Operational Fault	2
14	LVTTTL-O	RX_LOS	Receiver Loss Of Signal Indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver Inverted Data Output	
18	CML-O	RD+	Receiver Non-Inverted Data Output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply (Not Required)	



10Gbps 70KM CWDM XFP Optical Transceiver RTXM226-69X

21	LVTTTL-I	P_Down/RST	Power down; When high, requires the module to limit power consumption to 1.5W or below. 2-Wire serial interface must be functional in the low power mode. Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply (Not Required)	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock Non-Inverted Input, AC coupled on the host board (Not Required)	
25	PECL-I	RefCLK-	Reference Clock Inverted Input, AC coupled on the host board (Not Required)	
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter Inverted Data Input	
29	CML-I	TD+	Transmitter Non-Inverted Data Input	
30		GND	Module Ground	1
<p>Note1: Module ground pins GND are isolated from the module case and chassis ground within the module.</p> <p>Note2: Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.</p>				


Digital Diagnostic Functions

As defined by the XFP MSA, digital diagnostic functions are provided via a 2-wire serial interface, which allows real-time access to the following operating parameters:


- Transceiver Temperature
- Tx Bias Current
- Tx Optical Power
- RX Received Optical Power
- Transceiver +3.3V Supply Voltage
- Laser Temperature



10Gbps 70KM CWDM XFP Optical Transceiver RTXM226-69X

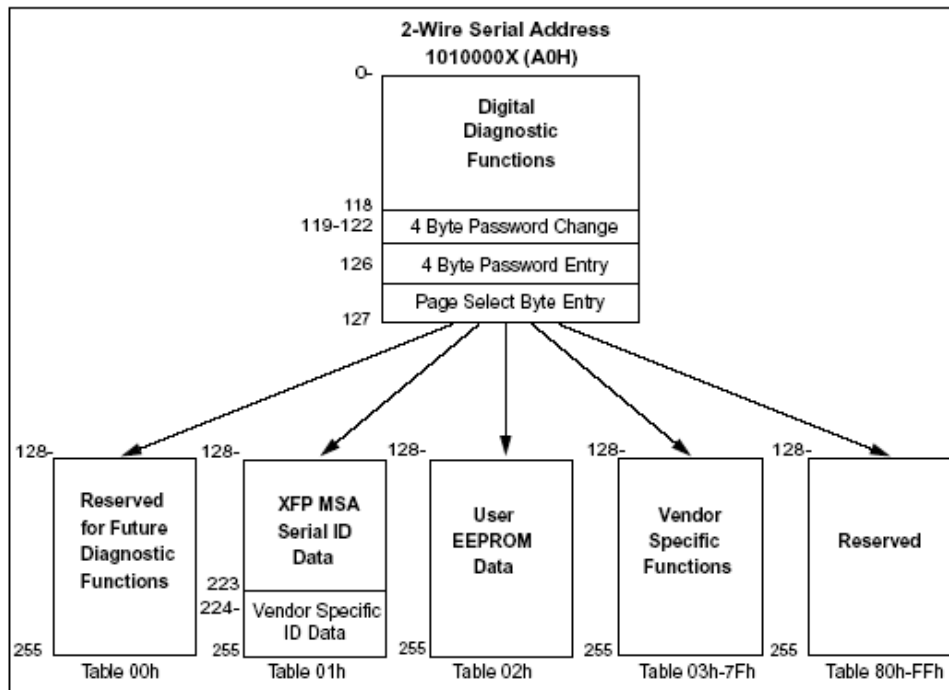


Typical Application Circuit for Power Supply

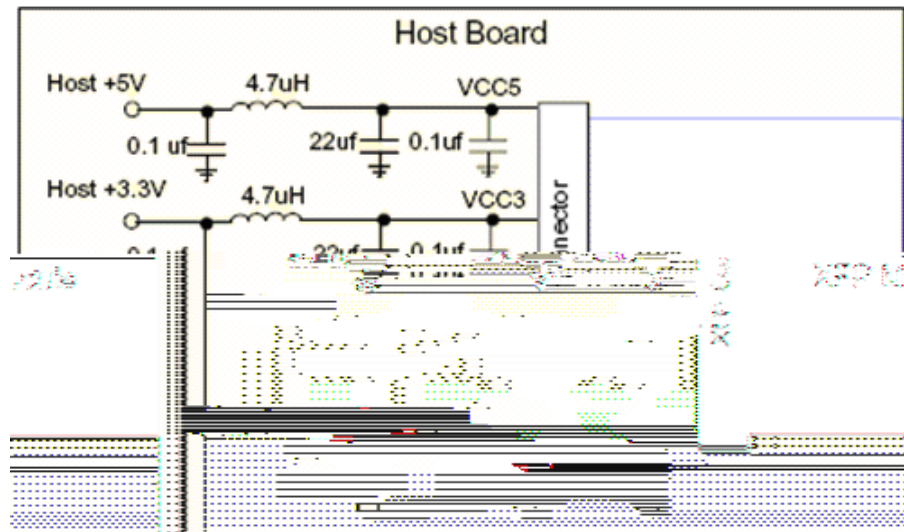

10Gbps 70KM CWDM XFP Optical Transceiver RTXM226-69X

Package Outline

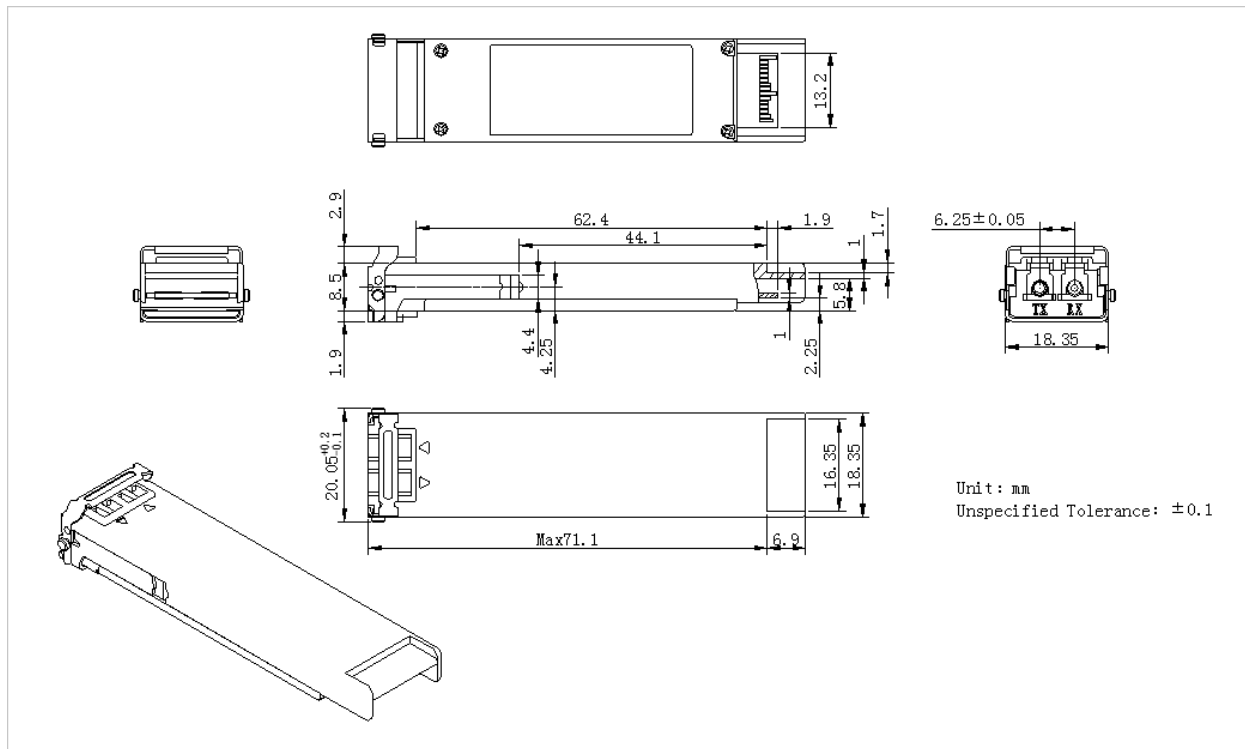

Regulatory Compliance

Feature	Test Method	Performance
Laser Eye Safety	FDA 21 CFR 1040.10 and 1040.11 IEC 60825-1: 1994+ A11: 1996+ A2: 2001 IEC 60825-2: 2004 + A1: 2006 EN 60825-1:1994+A1:2002+A2:2001 EN 60825-2: 2004	Compliant with Class 1 laser product
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7 Human Body Model	Class 1 (>1.5kV)
Electrostatic Discharge (ESD) Immunity	IEC 61000-4-2: 2001	Class 2 (>4.0kV)
Electromagnetic Interference (EMI)	FCC Part 15 Subpart J Class B CISPR22:1997+A1:2000+A2:2002, Class B EN55022:1998+A1:2000+A2:2003, Class B	Compliant with standards

10Gbps 70KM CWDM XFP Optical Transceiver RTXM226-69X

