



(Interleaver)

Telcordia GR-1221-CORE

RoHS

-
-
-

- DWDM
- DWDM

- Telcordia GR-1221-CORE
- RoHS


		100GHz~50GHz	200GHz~100GHz
	nm	C-band:1528~1568nm; L-band:1568~1610nm	
	nm	ITU-T Grid	
1	nm	±0.04	
	GHz	±8	±15
2	dB	2.0	2.0
@0.5dB	GHz	0.2	0.44
@25dB	GHz	80	160
	dB	0.5	
	dB	0.5	
	dB	25	
	dB	40	

	dB	50
	dB	0.5
	ps	0.2
	ps/nm	±75(high chromatic dispersion); ±30(low chromatic dispersion)
		0~65
		-40~+85
	mm	132*35*12
		133*90*16

1. 1dB

2.

WINT-□-□-□-□-□-□-□

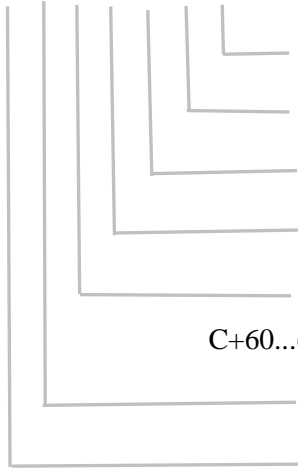

Application Type: M:MUX D:Demux

Connector 00: no connector FC SC LC/PC APC

Fiber Length 1: 1m customer specify

Fiber Dia. 09: 0.9mm 025: 0.25mm

Start Channel Number C11 C+11 C12 C+12 C60
 C+60...(Refer to ITU channel table)

Channel Spacing 1: 100GHz 3: 50GHz

Band C: C-band L: L-band