


+Tap

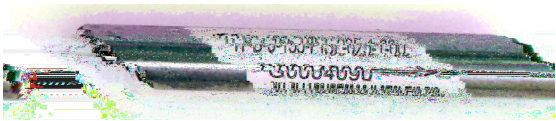

！
！
！
！

！
！
！
！

！ Telcordia GR-1221-CORE
！ RoHS

			nm	C-Band:1528~1569 L-Band:1568~1600	
	Tap	2%	dB	16.0~18.0	
		3%	dB	14.0~16.2	
		5%	dB	12.2~14.0	
		10%	dB	9.6~10.8	
			dB	Single	Daul
				≤0.8	≤1.0
			dB	≥21(PISL,PIS)	≥36(PID)
			dB	≥45	
			dB	≤0.4(PISL)	≤0.5(PID)
			dB	≤0.15	

	ps	≤0.05(PISL,PID); ≤0.10(PIS)
	dB	≥50
	mw	≤500
		-5~+70
		-40~+85
	mm	Φ5.2*32(); Φ3.0*30(mini);

IT- ! - ! - ! - ! - ! - ! - !

- Connectors:FC/UPC,SC/UPC,LC/UPC,00:No Connectorm
- Fiber Length 1 1.0m; customer specify
- Fiber Dia. 09 0.9mm 025: 0.25mm; customer specify
- Type: PIS:Single;PISL:Single,low PMD;PID:Dual
- Wavelength 155:C band.
- Split Ratio 1:1% 2 2%
- Pump Location A:Pump before ISO;B:Pump after ISO