
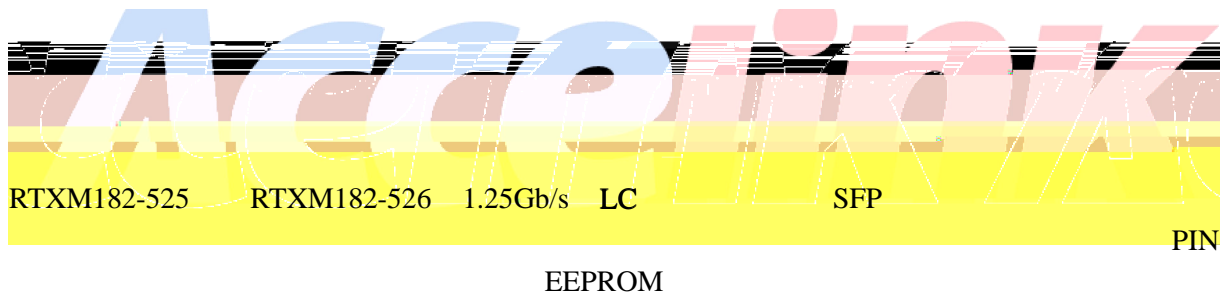


1. 25Gb/s 20km SFP

RTXM182-525 & RTXM182-526

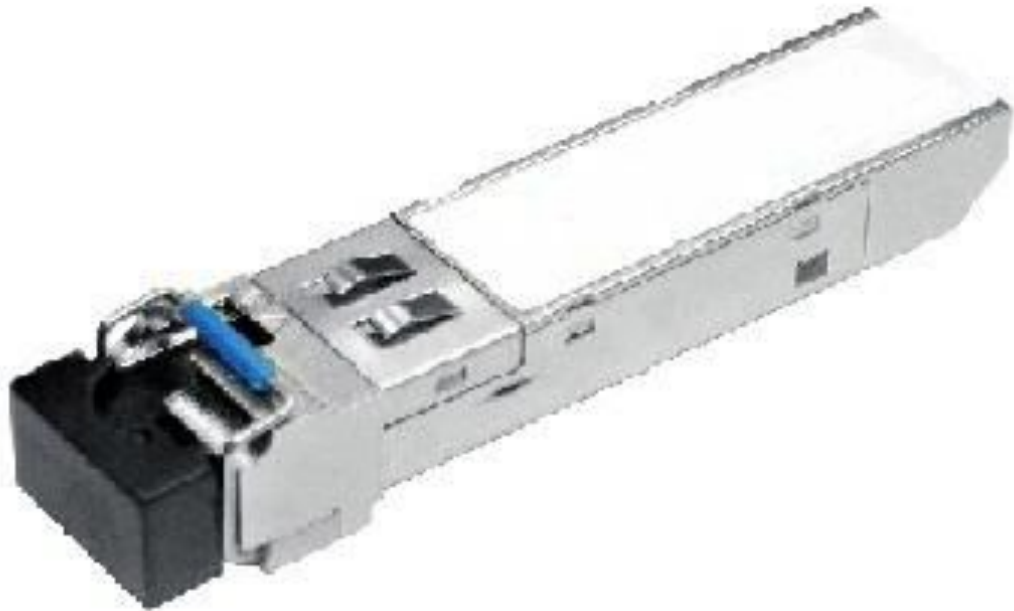

- SFP MSA (INF-8074i)
- IEEE802.3ah
- ITU-T G.957

参数	符号	单位	最小	典型	最大	备注
	Icc	mA	-	-	300	1
		mV	150	-	1100	
		mV	300	-	600	
TX_fault /LOS (TTL)	VOH	V	2.0	-	Vcc	
	VOL		0	-	0.8	
TX_disable (TTL)	VOH	V	2.0	-	Vcc	
	VOL		0	-	0.8	
1.25G BIDI SFP						
	Po		-9	-3		
	λ_c	nm	1260	1310	1360	FP-LD
			1480	1490	1500	DFB-LD
	EX	dB	9			
(RMS)	$\Delta\lambda$	nm			3	1310nmFP-LD
(20dB)	$\Delta\lambda$	nm			3	1490nmDFB-LD
		dB	30			
	Tp-p	ps			267	2
	RIN	dB/Hz			-120	
IEEE802.3ah						
	Poff	dBm	-	-	-45	
	λ_c	nm	1480		1500	
			1260		1360	
	S	dBm			-21	
	Pin	dBm	-3			
					-22	
		dB	-35			
		dB	0.5	3	5	
		dB			1	

备注 1.

备注 2. 1.25Gbps 23

型号	规格								应用
	接口	速率	波长	功率	调制	灵敏度	温度	距离	
RTXM182-525	SFP	1.25G	1310nm FP-LD	-9~-3 dBm	PIN 1490nm	< -21dBm	-40~85° C	20km	GE
RTXM182-526	SFP	1.25G	1490nm DFB-LD	-9~-3 dBm	PIN 1310nm	< -21dBm	-40~85° C	20km	GE

